MIC. LINE INPUT & SEL. REP. AMPLIFIER P.C. BOARD ASSY (PA-287A)

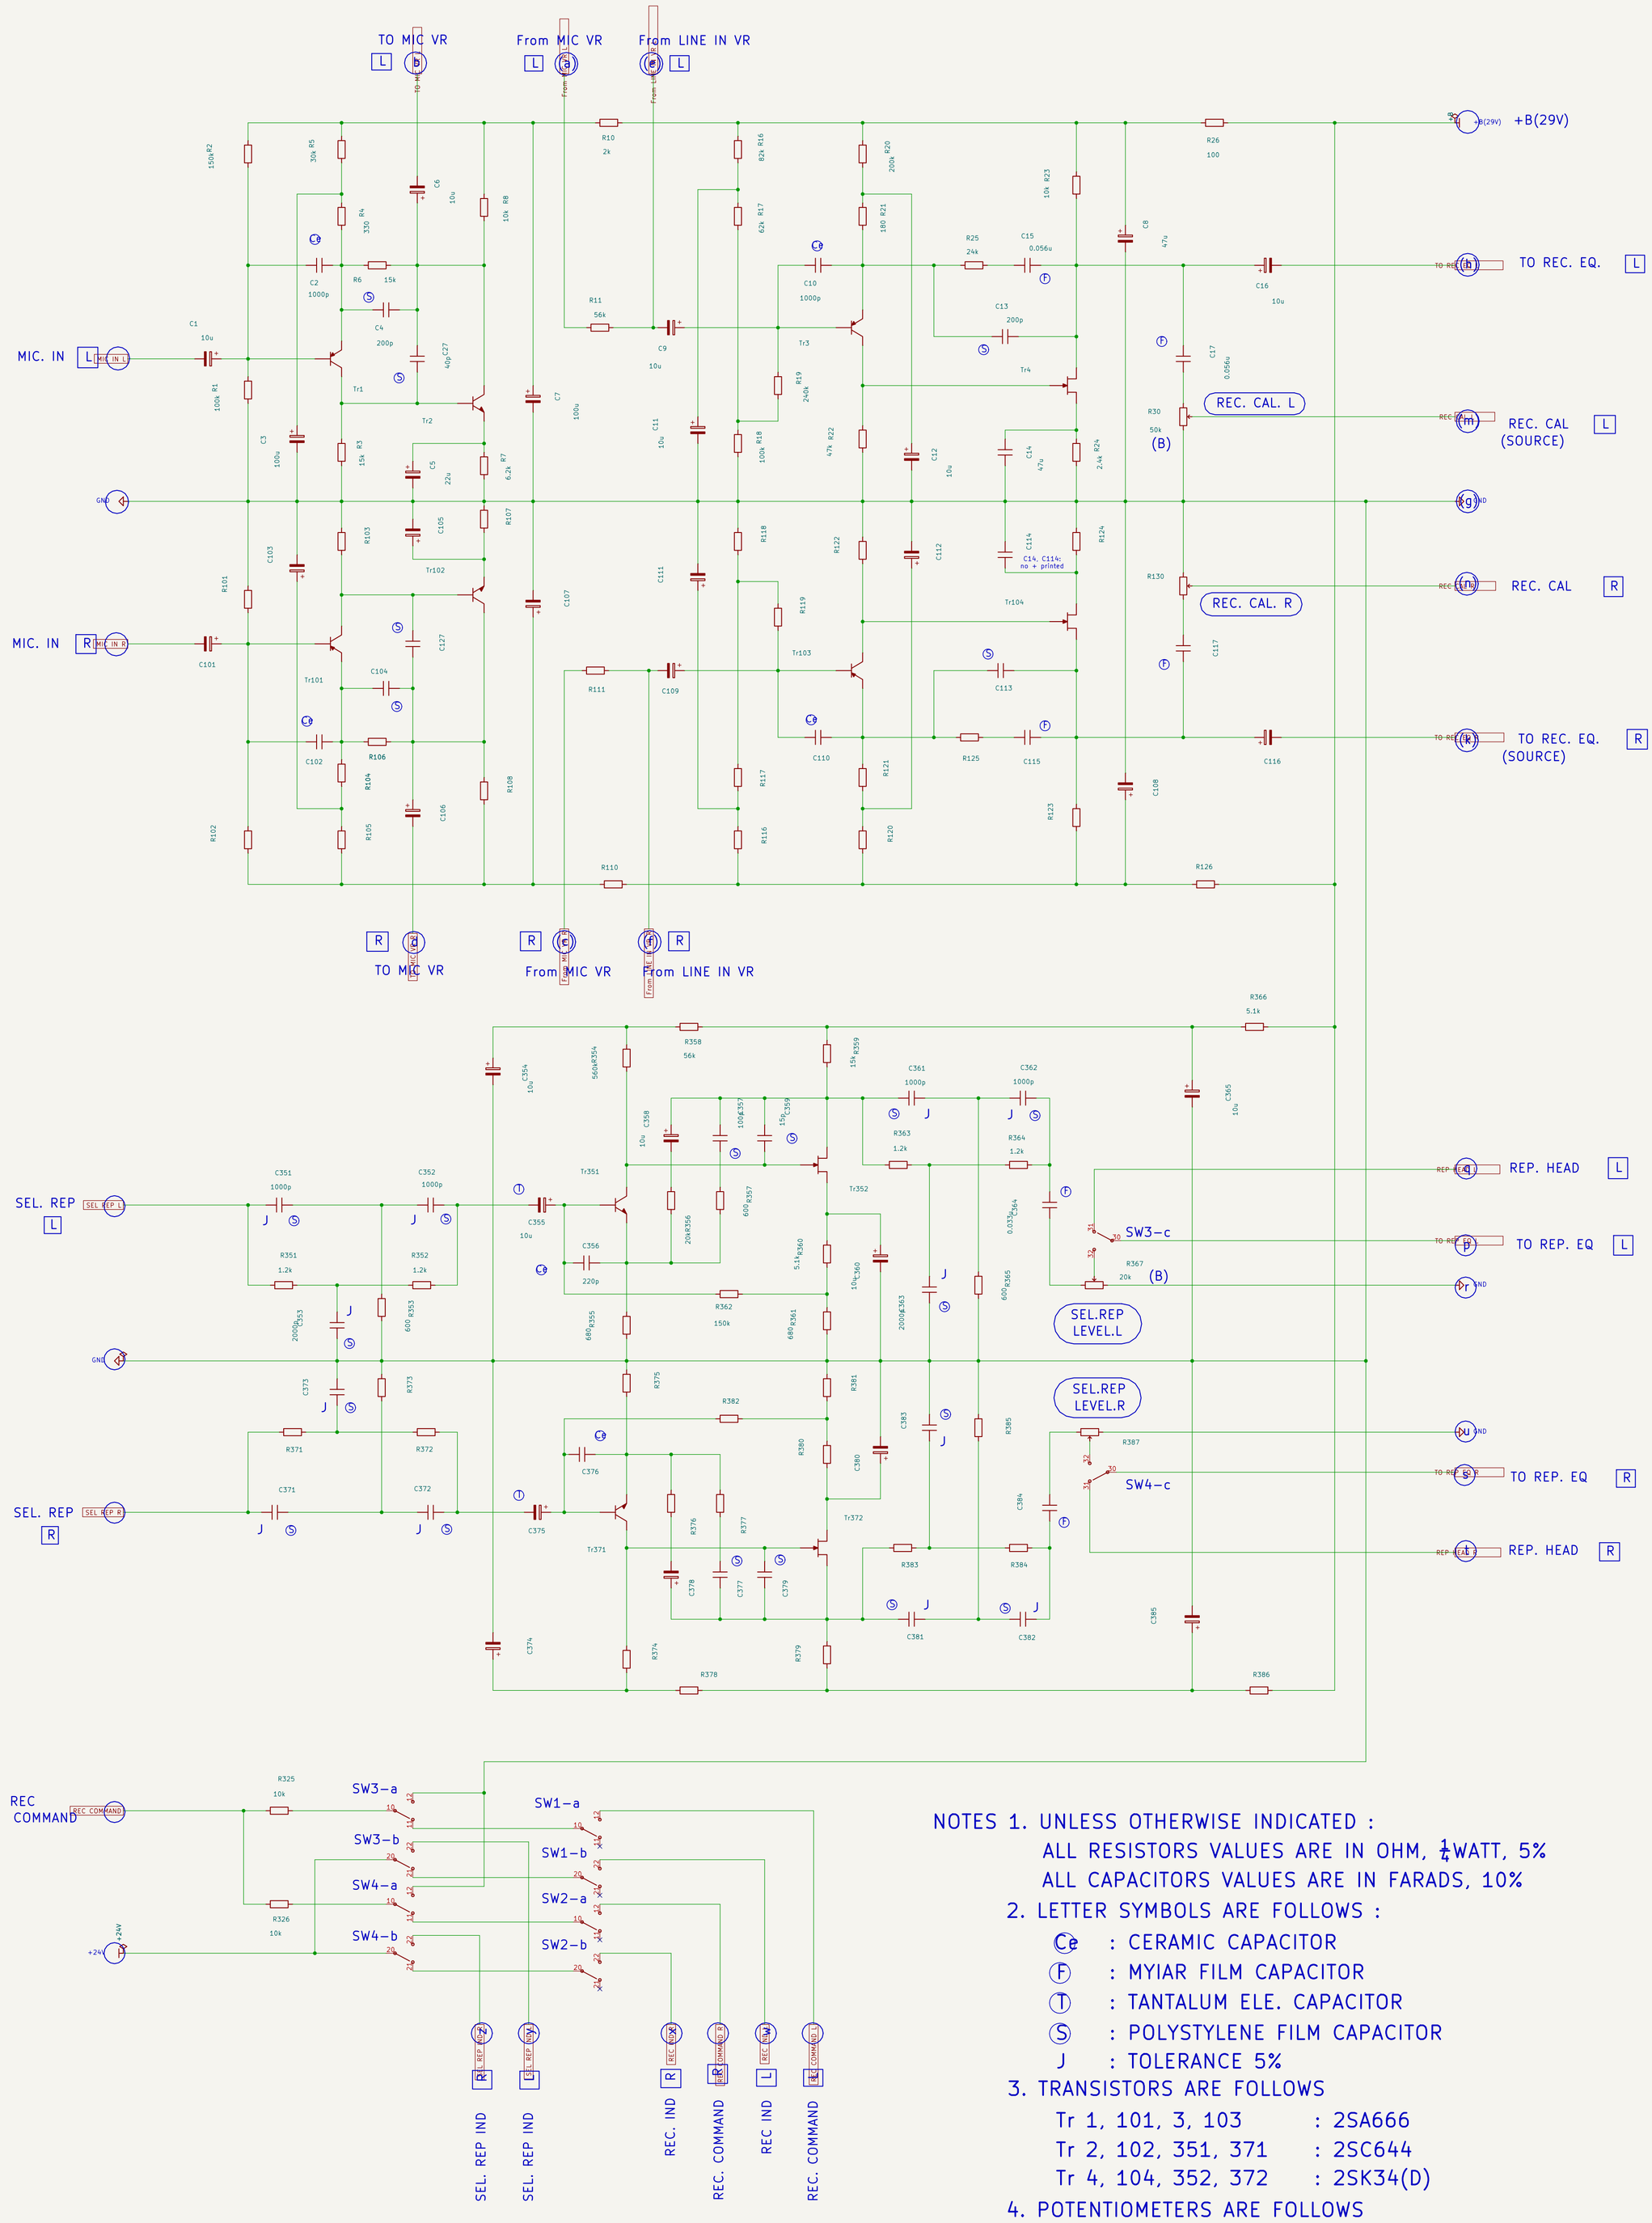

NOTES 1. UNLESS OTHERWISE INDICATED :
ALL RESISTORS VALUES ARE IN OHM, $\frac{1}{4}$WATT, 5%
ALL CAPACITORS VALUES ARE IN FARADS, 10%

2. LETTER SYMBOLS ARE FOLLOWS :
   - (Ce) : CERAMIC CAPACITOR
   - (F) : MYIAR FILM CAPACITOR
   - (T) : TANTALUM ELE. CAPACITOR
   - (S) : POLYSTYLENE FILM CAPACITOR
   - J : TOLERANCE 5%

3. TRANSISTORS ARE FOLLOWS
   - Tr 1, 101, 3, 103 : 2SA666
   - Tr 2, 102, 351, 371 : 2SC644
   - Tr 4, 104, 352, 372 : 2SK34(D)

4. POTENTIOMETERS ARE FOLLOWS
   - R30,130 : RECORD LEVEL CAL.
   - R367,387: SEL/REP LEVEL ADJ.

5. SWITCHES ARE FOLLOWS
   - SW 1, 2 : RECORD SW
   - SW 3, 4 : SEL. REP. SW.