


MX5050D TRANSPORT ELECTRONICS (TD5050DA)

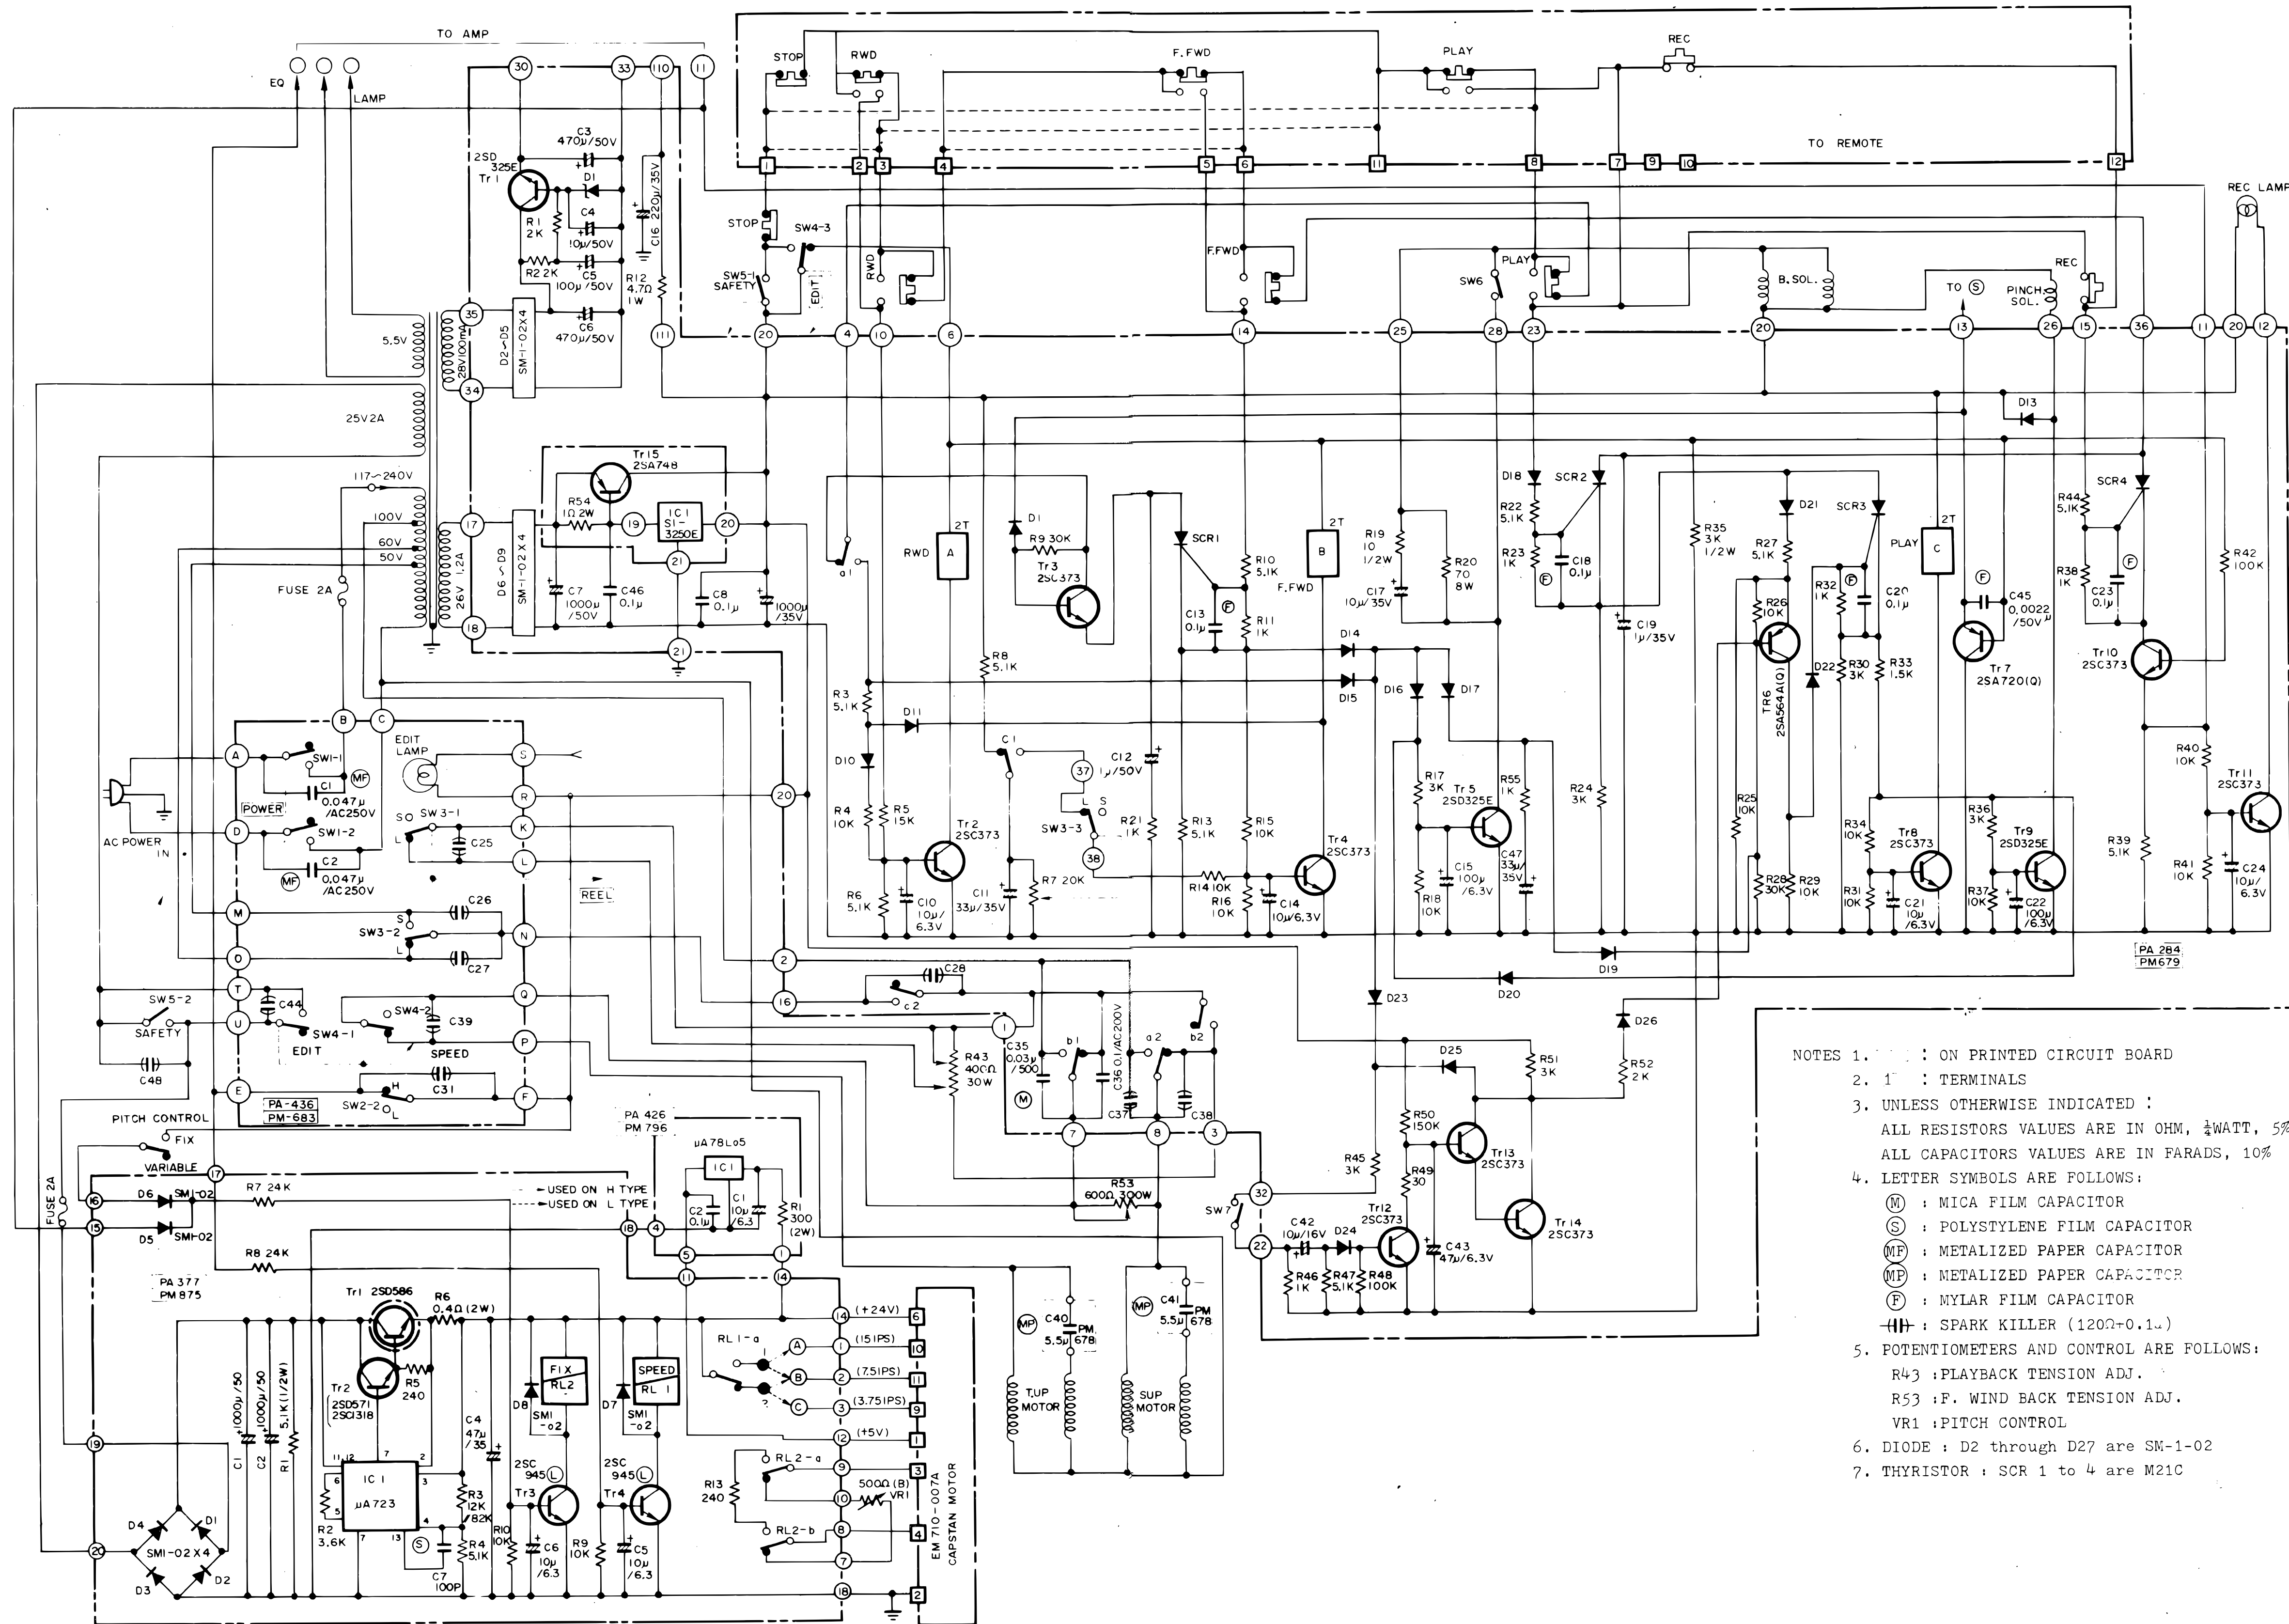

- NOTES 1. : ON PRINTED CIRCUIT BOARD
 2. 1 : TERMINALS
 3. UNLESS OTHERWISE INDICATED :
 ALL RESISTORS VALUES ARE IN OHM, 1/4WATT, 5%
 ALL CAPACITORS VALUES ARE IN FARADS, 10%
 4. LETTER SYMBOLS ARE FOLLOWS:
 (M) : MICA FILM CAPACITOR
 (S) : POLYSTYLENE FILM CAPACITOR
 (MF) : METALIZED PAPER CAPACITOR
 (MP) : METALIZED PAPER CAPACITOR
 (F) : MYLAR FILM CAPACITOR
 (SK) : SPARK KILLER (120Ω/0.1μ)
 5. POTENTIOMETERS AND CONTROL ARE FOLLOWS:
 R43 : PLAYBACK TENSION ADJ.
 R53 : F. WIND BACK TENSION ADJ.
 VR1 : PITCH CONTROL
 6. DIODE : D2 through D27 are SM-1-02
 7. THYRISTOR : SCR 1 to 4 are M21C