MX5050D TRANSPORT ELECTRONICS (TD5050DA)

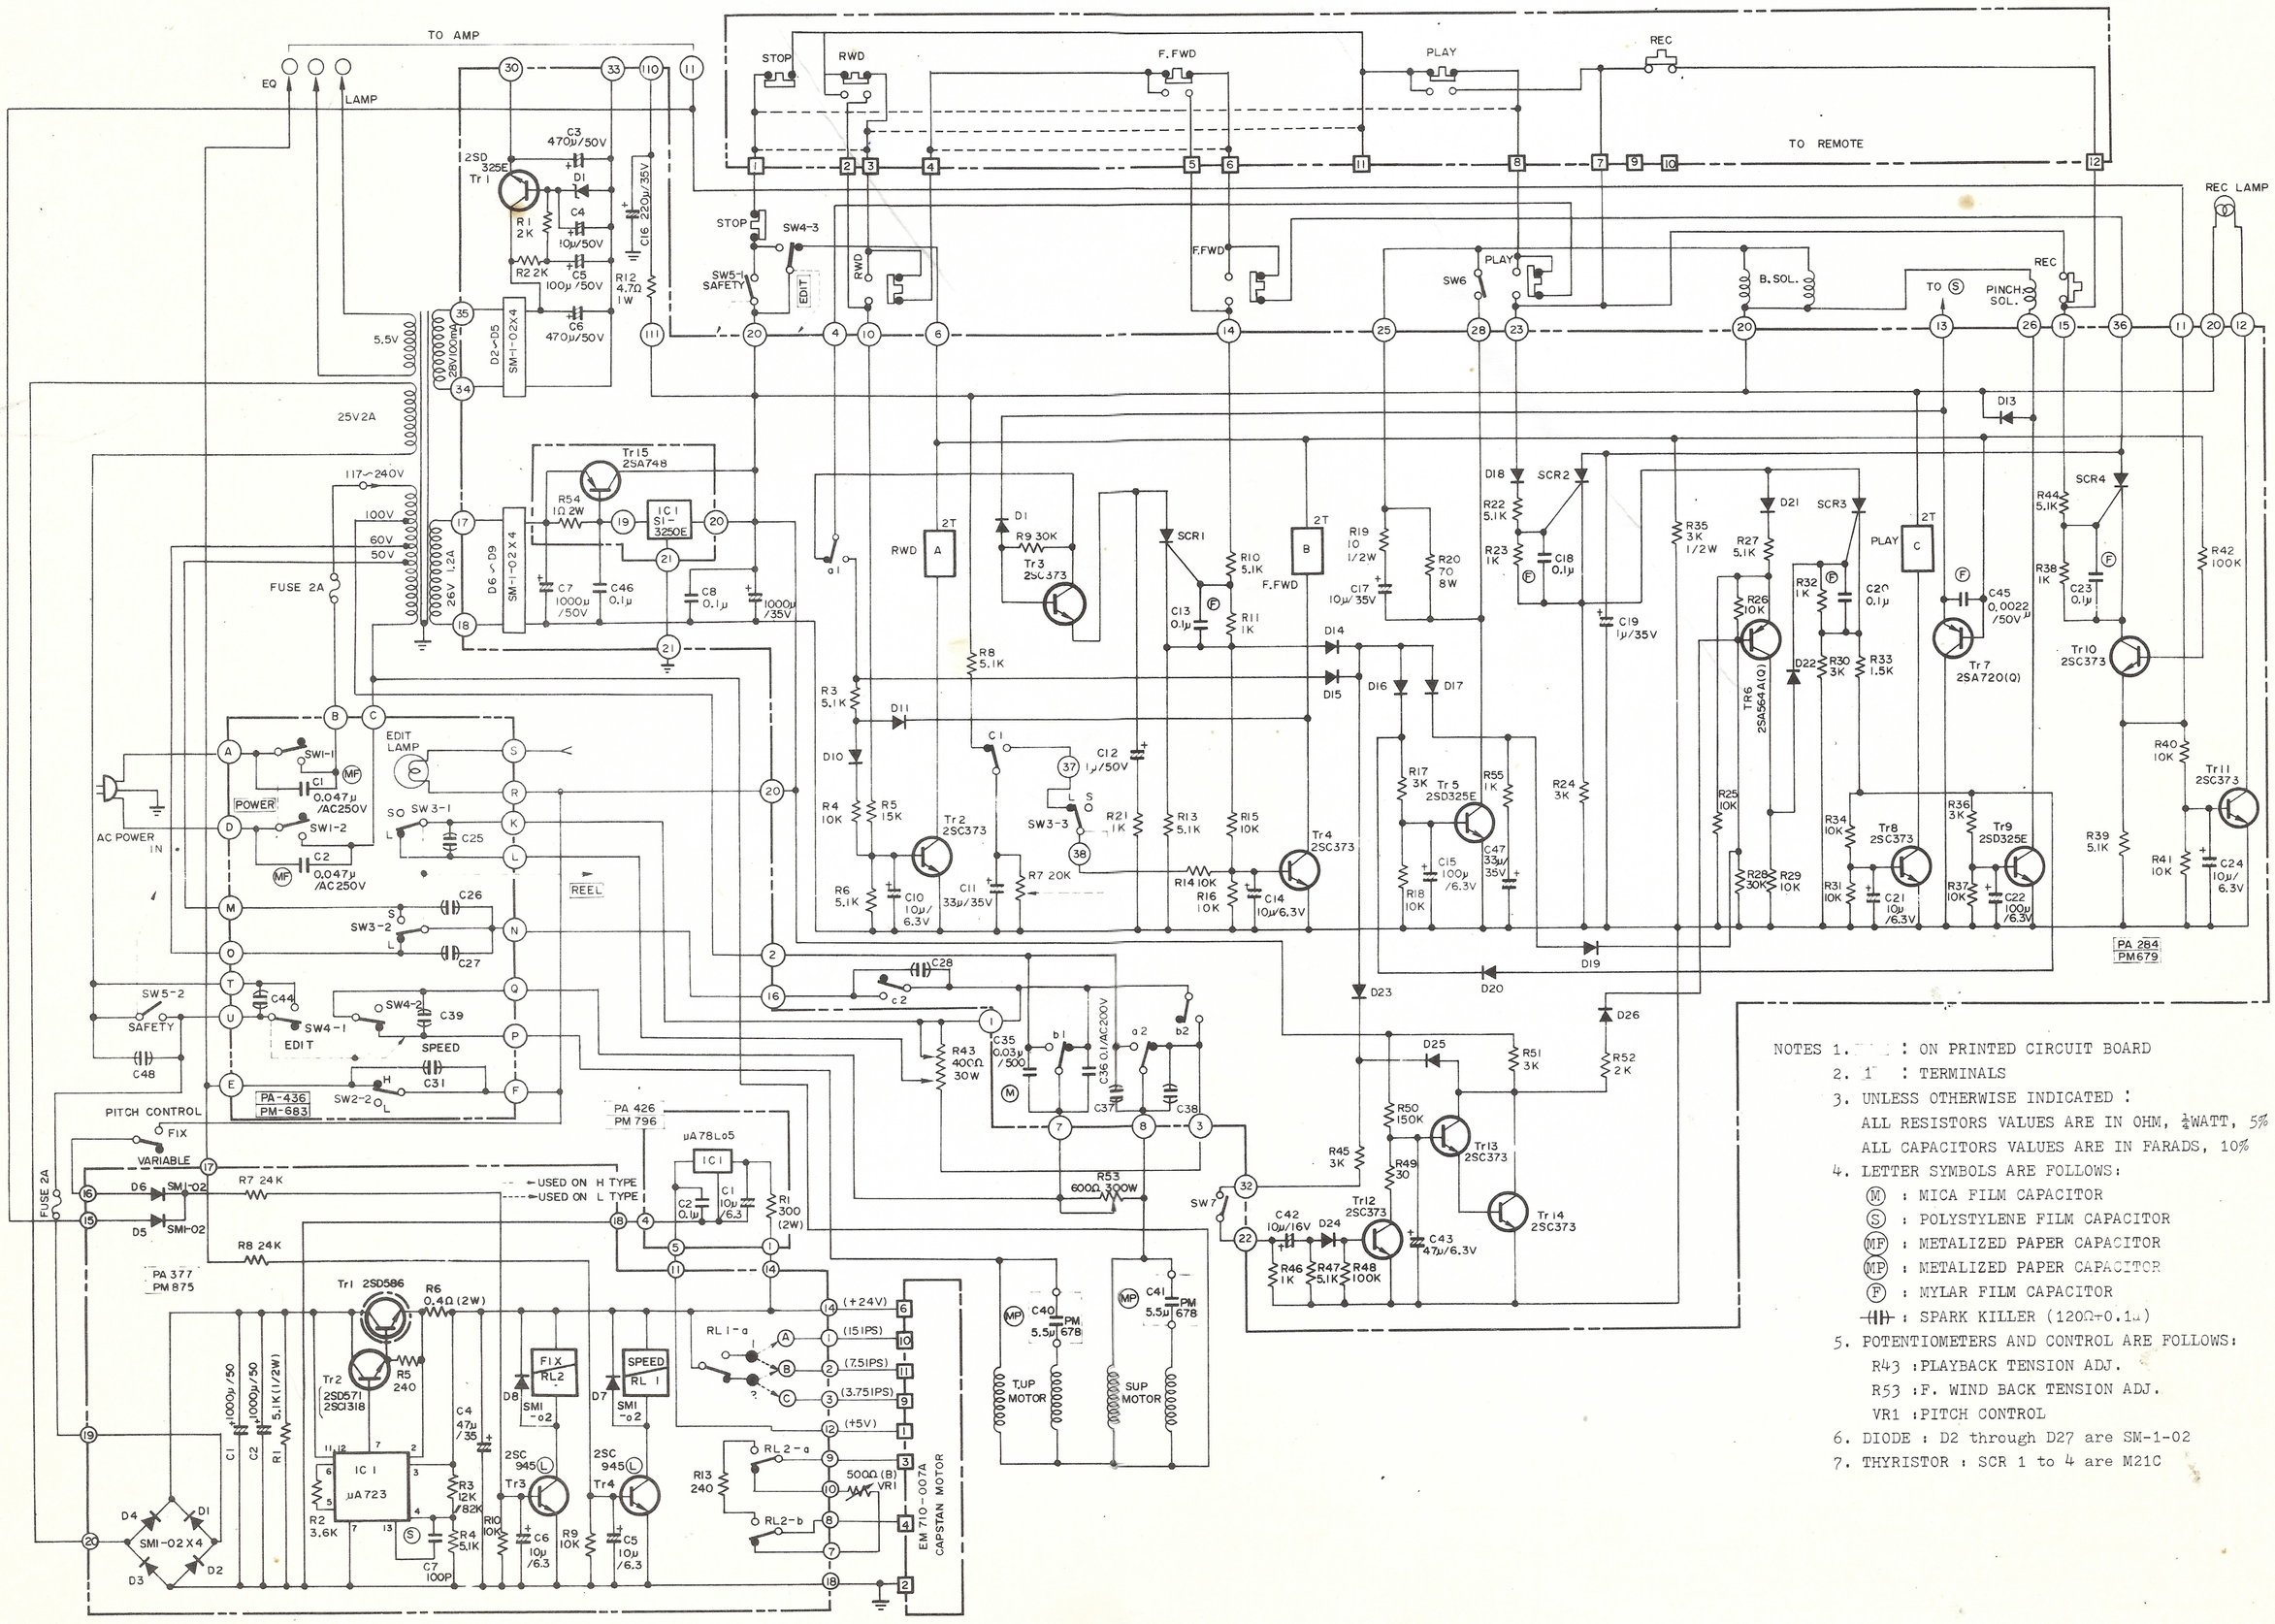

NOTES 1. ▭ : ON PRINTED CIRCUIT BOARD
2. 1 : TERMINALS
3. UNLESS OTHERWISE INDICATED :
ALL RESISTORS VALUES ARE IN OHM, ¼WATT, 5%
ALL CAPACITORS VALUES ARE IN FARADS, 10%
4. LETTER SYMBOLS ARE FOLLOWS:
(M) : MICA FILM CAPACITOR
(S) : POLYSTYLENE FILM CAPACITOR
(MF) : METALIZED PAPER CAPACITOR
(MP) : METALIZED PAPER CAPACITOR
(F) : MYLAR FILM CAPACITOR
⊣⊢ : SPARK KILLER (120Ω+0.1μ)
5. POTENTIOMETERS AND CONTROL ARE FOLLOWS:
R43 :PLAYBACK TENSION ADJ.
R53 :F. WIND BACK TENSION ADJ.
VR1 :PITCH CONTROL
6. DIODE : D2 through D27 are SM-1-02
7. THYRISTOR : SCR 1 to 4 are M21C