

OTARI

5050
SERIES

Model 5050 B-II 1/4" Two Channel Recorder

The Otari 5050 B-II is a compact recorder in the 1/4" two channel format. The optimized three head design and transformerless balanced inputs and outputs provide superior frequency response, distortion and signal-to-noise performance under professional studio conditions.

The capstan motor is under servo control and is switchable between 15/7.5 ips and 7.5/3.75 ips speed pairs. An integral microprocessor controls the real-time counter which features an HRS/MINS/SECS L.E.D. display that is tape accurate at all three speeds.

Front panel access is provided for record setup adjustments and a built in oscillator provides 1 kHz and 10 kHz tones.

The extremely rugged mechanical construction includes a 1/4" deckplate with cast aluminum side panels and steel support members. All circuit boards are designed to swing out or unplug for full service access.

The 5050 B-II is compatible with all dbx¹ noise reduction products.

A transport remote control (model CB-102) is available as an option, as well as a roll-around floor stand (ZA-52L).

continued on back side



Each 5050 B-II incorporates these standard features:

- Transformerless balanced inputs and outputs with XL type connectors.
- Line output switch selectable for +4 dBm or -10 dBV level.
- Mic input has switch selectable 20 dB pad and mute.
- Mic/Line mixing on each channel.
- Headphone monitor output.
- Lighted VU meters with L.E.D. peak indication.
- 3 speeds switch selectable in 15/7.5 ips or 7.5/3.75 ips speed pairs.
- Record reference level switch selectable (185, 250, 320 nWb/m.)
- Equalization switch selectable (NAB, IEC).
- Reel Size switch selectable (5"-7", 10.5") EIA or NAB.
- Low frequency reproduce eq. adjustable.
- Fourth head switch selectable for 1/4 track stereo playback.
- Plug-in head assembly with hinged cover for easy access.
- Front panel record setup adjustments.
- Integral splicing block.
- Built-in test oscillator (1 kHz, 10 kHz).
- Microprocessor-controlled HRS/MINS/SECS real-time counter with L.E.D. display.
- Dump Edit and Cue (lifter defeat) modes.
- D.C. capstan motor, servo controlled.
- Variable speed control ($\pm 7\%$) usable in record and play.
- Memory stop switch selectable to stop tape when rewinding past 0:00:00.

The 5050 B-II Recorders are covered by a one-year parts and labor limited warranty. Heads, pinch roller, fuses, and lamps have a 90-day parts warranty.

Call or write for full color, descriptive brochure.

¹Trademark dbx. Incorporated

5050 B-II 1/4" TWO CHANNEL SPECIFICATIONS

TRANSPORT

Tape Width and Channels:	1/4" (6.3mm) tape, 2 channel
Tape Speeds:	15 and 7.5 ips or 7.5 and 3.75 ips internally switchable speed pairs
Maximum Speed Deviation:	$\pm 0.2\%$
Reel Size	1/4" x 5, 7 or 10.5" EIA or NAB
Heads:	Erase (half track), Play (quarter track), Record (half track), Play (half track)
Motors:	D.C. servo-controlled capstan motor, two induction reel motors
Rewind Time:	Less than 90 seconds for a 2,400' reel
Pitch Control:	Variable within $\pm 7\%$
Wow and Flutter:	15 ips, less than 0.04% 7.5 ips, less than 0.07% 3.75 ips, less than 0.08%

ELECTRONICS



Connectors:	Line input, Mic input and Line output: standard three pin XL type. Headphone: standard 1/4" phone jack
Inputs:	Line: Active, balanced, 10 kOhms Mic: Active, balanced, usable: 150 Ohms to 10 kOhms Switchable 20 dB pad and mute
Outputs:	Active, balanced 5 Ohms source impedance +27 dB (ref. 0.775 V) into 600 Ohms or more
Signal-To-Noise Ratio: (3% Third Harmonic to noise floor, 30-18kHz) NAB EQ	15 ips 72 dB unweighted 7.5 ips 72 dB unweighted 3.75 ips 70 dB unweighted
Equalization:	IEC or NAB, switchable
Crosstalk:	Less than 55 dB at 1 kHz on adjacent track
Frequency Response: (Record/Reproduce)	15 ips (0 VU): 25 Hz to 22 kHz ± 2.0 dB 7.5 ips (-10 VU): 20 Hz to 20 kHz ± 2.0 dB 3.75 ips (-20 VU): 20 Hz to 12 kHz ± 2.0 dB
Operating Level:	250 nWb/m, (optionally selectable to 185 or 320 nWb/m)
Distortion: (1 kHz, 250 nWb/m.)	Less than 0.5% Third Harmonic (15 ips)
Test Oscillator Frequencies:	Nominal 1 kHz and 10 kHz
Test Conditions:	As specified, using 3M #226 tape

PHYSICAL

Power Requirements:	100/117/220/240 V, $\pm 10\%$, 50/60 Hz single phase AC, 140 W
Operating Environment:	40 to 104 degrees F (5° to 40°C), 20 to 80% R.H.
Storage Environment:	-5 to +113 degrees F (-20° to +45°C), 10 to 80% R.H.
Mounting:	Vinyl covered wood case; (RK-2B) Rack mounting kit and (ZA-52L) Roll-around stand optional
Standard Accessories:	Reel hold down knobs, 1/4" x 10 1/2" empty NAB reel, operation manual and power cord
Optional Accessories:	CB-102 Remote transport control ZA-52L Roll-around stand ZA-53T Input isolation transformers ZA-53S Output isolation transformers RK-2B rack mount FC-2B flight case
Weight:	60 lbs. (27 kg)

Manufactured in Japan by Otari Electric Co., Ltd.

Otari reserves the right to change specifications without notice or obligation.

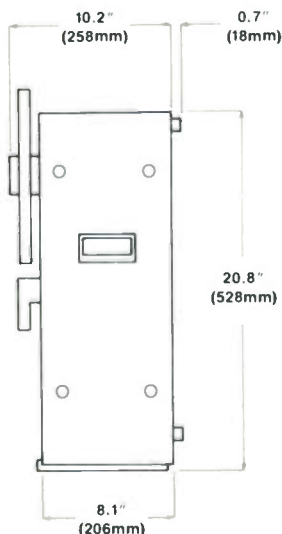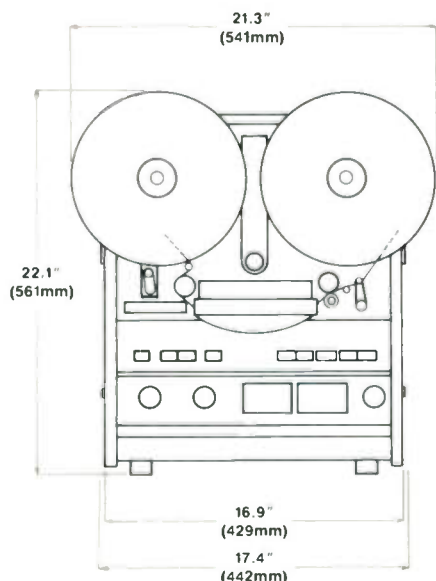

OTARI

Otari Corporation
2 Davis Drive
Belmont, California 94002
(415) 592-8311
Telex: 910-376-4890

Otari Electric Co., Ltd.
4-29-18 Minami Ogikubo
Suginami-ku, Tokyo, Japan
TEL (03) 333-9631
FAX (03) 331-5802

Printed in U.S.A.
© 1984 Otari Corp.